



Industrial telephone Type A24

The weatherproof A24 is suited for dusty and moist environments. It is designed for DTMF and pulse dialing as well as a PABX device and end device. Its keypad consists of 16 durable buttons that can also optionally be ordered to light up. A continuously adjustable fixture protects the telephone handset against shocks. An integrated volume amplifier can be optionally added on. We are also happy to offer the A24 with two custom buttons that can be assigned individual functions as desired.

Industrial telephone

Type A24




Technical data

Storage temperature	-40°C - +70°C
Operating temperature	-25°C - +55°C
Relative humidity	max 95%
Casing enclosure	IP 66
Dialing modes	DTMF or pulse*
CE conformity	EN 50081, EN 50082, EN 60950, access based on CTR21
Tone signaling volume	60dB - 90dB at 1m distance
Functions	depending on number of keys, 4-6 functions, redialing, mute, receiver amplification 4x + 3dB, headset*/ line ground*/ flash, 4 direct outward dialing buttons, open listening, abbreviated dialing
Connection terminals	clamping range 0,08 - 2,5mm ² single-, multi- and fine wire
Cable gland	M16, Ø 5-10mm Dummy plugs: 1 x M12*, 1 x M16 Handset: M12Flex, Ø 3-6,5mm
Material	Casing: polyamide Locking screws: V4A (1.4571)

* not available at A24/Basic

Dimensioned drawing

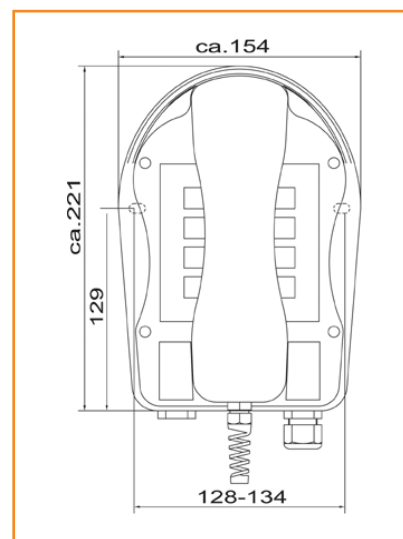

Model

Order no.

with spiral handset cord	01.01000
with spiral handset cord + 1 special key	01.01001
with spiral handset cord + 2 special keys	01.01002
with stainless steel handset cord	01.02000
with stainless steel handset cord + 1 special key	01.02001
with stainless steel handset cord + 2 special keys	01.02002
with lighted keypad + spiral handset cord	01.03000
with lighted keypad + spiral handset cord + 1 special key	01.03001
with lighted keypad + spiral handset cord + 2 special keys	01.03002
with lighted keypad + stainless steel handset cord	01.04000
with lighted keypad + stainless steel handset cord + 1 special key	01.04001
with lighted keypad + stainless steel handset cord + 2 special keys	01.04002
A24/Basic with spiral handset cord	01.41000
A24/Basic with stainless steel handset cord	01.42000

Dimensions:

221 (height) x 154 (width) x 105 (depth) mm

Distance between holes for mounting:

128-134mm

Weight:

approx. 1250 g